

# TEC® LB1305 Toner Unit



Oasis Imaging Products, Inc. Technical Support: (888) 627-6555

**Reference Information:**

OEM PN: 388227  
 OEM Yield: 3,000 @ 5% coverage

**Approximate Remanufacturing Time:**  
 15 min.

**Instructions:**

1. Turn the printer to the "OFF" position.
2. Open the cover and remove the developing block from the printer (Fig. 1).
3. Grasp the toner transfer unit by its handles (Fig. 2) and remove it from the basket. Place the toner transfer unit on a piece of scrap paper.
4. Tap the top of the toner cartridge lightly to shake any adhering toner into the tub below the cartridge.
5. Press the cartridge release tab and slide the old cartridge to the left, then remove the cartridge and discard it.
6. Shake the new cartridge left and right a few times before lowering it into the notches on the toner transfer unit (Fig. 3). Do not slide it into place yet.
7. Holding the toner transfer unit in place by pressing down the toner cartridge, pull the sealing film out to the side until the seal is completely removed (Fig. 4). Tap lightly on the toner cartridge.
8. Slide the cartridge into place and pull the toner transfer unit back into the basket.
9. Replace the cleaning wand.
10. Put the developing block back into the printer. Press down gently on the drum units handles then close the cover.

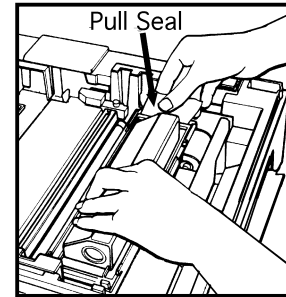


Figure 1

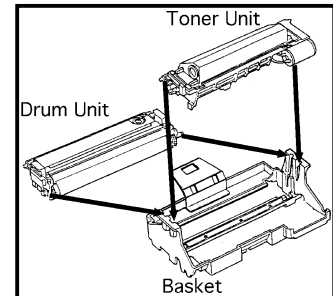


Figure 2

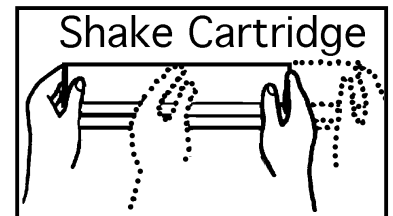


Figure 3

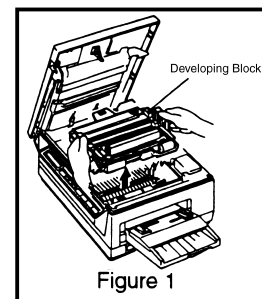


Figure 4